


ISUZU GIGA FVZ PRO

TOUGH PERFORMER



6 x 4 RIGID

FVZPRO
GVW 26,000kg

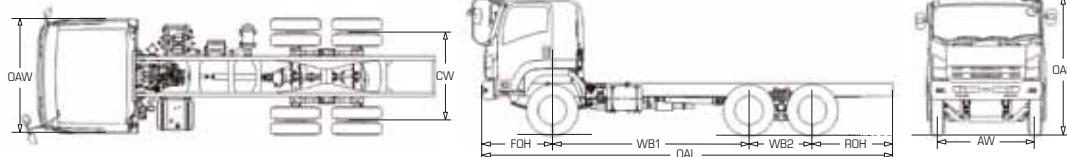

DIMENSIONS			FVZ 34 SU-PD
Overall Length	OAL	mm	8,365
Overall Width	OAW	mm	2,400
Overall Height	OAH	mm	2,850
Wheelbase	WB	mm	4,000 + 1,300
Front Overhang	FOH	mm	1,440
Rear Overhang	ROH	mm	1,625
Front Tread	AW	mm	1,970
Rear Tread	CW	mm	1,855

ISUZU
GIGA

SPECIFICATION SHEET

MODEL CODE


FVZ PRO
FVZ 34 SU-PD

Drive Train	6 X 4	
ENGINE		
Model	6HK1 - TCS	
Type	6-Cylinder In-line, 4-Cycle, Water-cooled, OHC, Turbo with Intercooler	
Displacement	cc	7,790
Bore x Stroke	mm	115 x125
Compression Ratio	17.5:1	
Maximum Output	kW (PS) @ rpm	213 (285) @ 2,400
Maximum Torque	Nm (kgm) @ rpm	883 (90) @ 1,450
Emission Level	Euro 2	
Fuel System	Common Rail Direct Injection	
WEIGHT & CAPACITIES		
Gross Vehicle Weight (Design)	kg	26,000
Curb Weight	kg	6,955
Front	kg	3,105
Rear	kg	3,850
Fuel Tank Capacity	l	200
AXLE		
Front	Type	Reverse Elliot, I-Beam
Front Axle Capacity (Design)	kg	6,300
Rear	Type	Single Reduction Banjo Design Full Floating
Rear Axle Capacity (Design)	kg	21,000
SUSPENSION SYSTEM		
Type	Front	Semi Elliptical Alloy Steel Leaf Springs with Double Acting Telescopic Shock Absorber
	Rear	Trunnion Semi-elliptic Leaf Springs with Torque Rods
TYRES & WHEELS		
Tyres	11R22.5-16PR	
Wheels	22.5 x 8.25	
BRAKES		
Service	Air Over Hydraulic, Dual Circuit	
Parking Brake Type	Mechanical Expansion Type, Located at the Rear End of Transmission	
Auxiliary	Exhaust Brake	
STEERING		
Steering System	Power Assist, Recirculating Ball Type	
Min. Turning Radius	m	9.7
ELECTRICAL		
Battery	24V	
Alternator	24V-50A	

Isuzu Malaysia Sdn. Bhd. is engaged in an ongoing research and development programme, and reserves the right to change specifications, resulting in advancements or technical refinements, without prior notice. All product specifications are within normal manufacturing allowances and tolerances.



ISUZU MALAYSIA SDN BHD (664946-H)
501D, LEVEL 5, TOWER D, UPTOWN 5,
NO 5, JALAN SS21/39, DAMANSARA UPTOWN,
47400 PETALING JAYA, SELANGOR DARUL EHSAN.
GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779
HOTLINE: 1-300-88-1133 www.isuzu.net.my

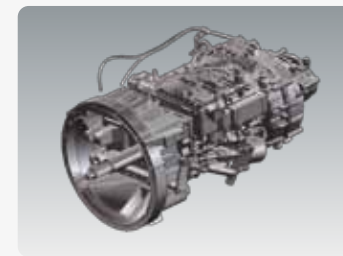

ZF 9 Speed Transmission with Crawler Gear




High Rigidity Cab with Cation Electrodepositing Coating



Air Suspension Driver Seat



High Approach Angle (29 degrees)

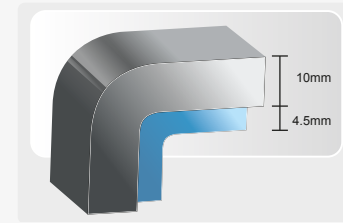

Strong Frame Chassis Plus Additional Reinforcement 4.5mm



Bigger Rear Axle Capacity (21 ton)

TRANSMISSION	Gear Ratio										
	C	1st	2nd	3rd	4th	5th	6th	7th	8th	Reverse	Final
FVZ 34 SU-PD 9-Speed Manual (ZF9S)	12.728	8.829	6.281	4.644	3.478	2.538	1.806	1.335	1.000	12.040	6.143

Dealer's information

*Terms and conditions apply.

Accessories Warranty Varies